




Peanut Sheller

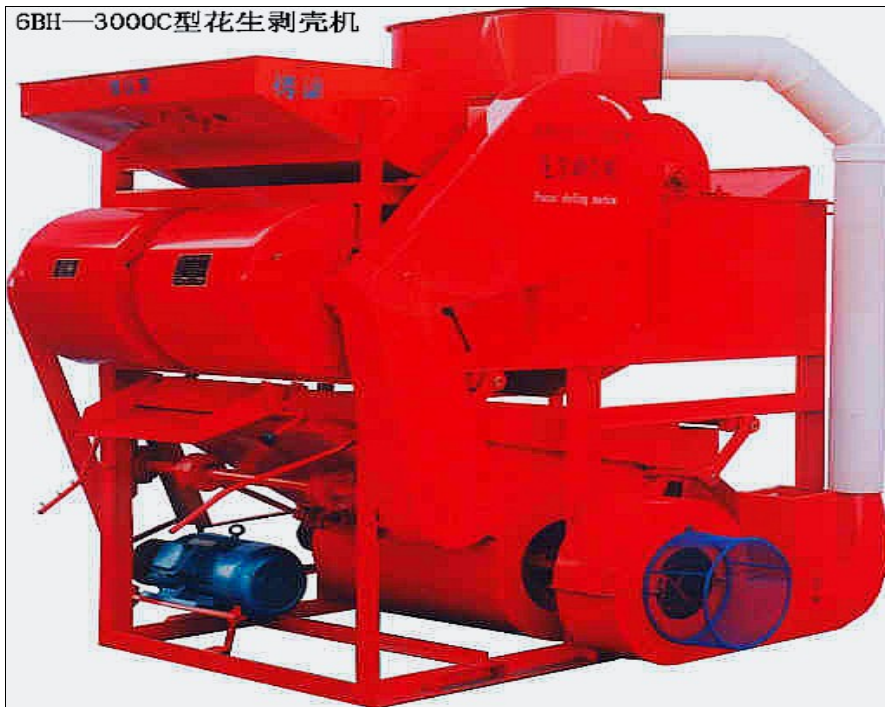

Specification

Item/Model	UI-400	UI-800	UI-1500	UI-3000	UI-5000
Yield	400kg/h	800kg/h	1500kg/h	3000kg/h	5000kg/h
Thus net rate	≥95%	≥98%	≥98%	≥98%	≥98%
Breakers rate	≤5%	≤4%	≤4%	≤5%	≤4%
Cleanliness	≥95.5%	≥97.5%	≥97.5%	≥99%	≥97%
Injury rate	≤4%	≤3.5%	≤3.5%	≤4%	≤3.5%
Loss	≤0.5%	≤0.5%	≤0.5%	≤0.5%	≤0.5%
To use force	2Class-2.2kw	4Class-4kw	4Class-7.5kw	4Class-7.5kw	15.9kw
The number of operations	1~2	2~3	3~5	2~4	6~9
Machinery weight	127kg (Non-electrical)	330kg (Non-electrical)	700kg (Non-electrical)	1080kg (Non-electrical)	1550kg (Non-electrical)
Size appearance	1200×660×1240 (mm)	1520×1060×1660 (mm)	1960×1250×2170 (mm)	2540×1360×3000 (mm)	2150×1580×2620 (mm)